

Winterhalter P50 Pass Through warewasher

General information:

With its high performance, the **single skinned, electro-mechanical rack pass through dishwasher** is designed for straight through or corner operation and to be used in conjunction with ancillary tabling. The **programme switch** guarantees a simple and user friendly mechanical operation. The P50 is a highly effective machine, fitted with **rotating wash arms**. The **collision wash jets** with its high-power nozzles provide **maximum washing power** and guarantee the best cleaning results. The P50 is ideal for high volume catering and hospitality dishwashing – perfect for the busy commercial kitchen wash up area.

Features:

- Non pressurised boiler for rinsing
- Temp gauges
- Two wash programmes (2min./1min.)
- Self-draining programme
- Clear entry height 410 mm
- Auto hood start
- Easy removable wash arms for a simple cleaning of the machine
- Rear cover
- 12 kW Boiler heater
- Vermin tray



Your benefits are:


- Best dishwashing results
- Easy operation
- Low operating costs
- Energy efficiency
- Short wash-cycle-time
- Modern and compatible design
- High service friendliness

Options:

- Rinse aid pump
- Detergent pump
- Drain pump



Winterhalter P50 Pass Through warewasher

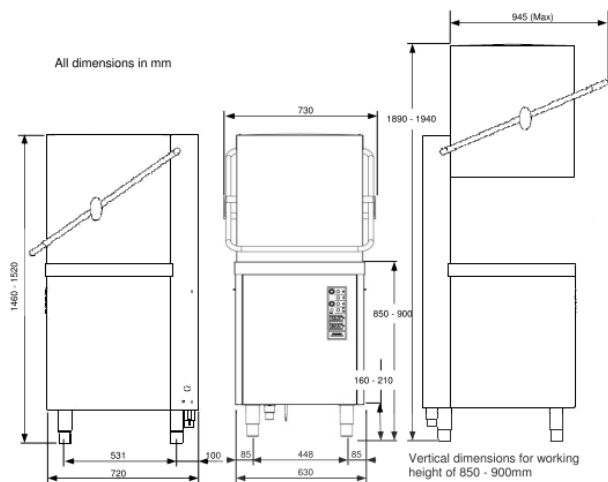

Dimensions

Width x depth:	630 x 720 mm
Height hood closed:	1,460 mm
Height hood open:	1,890 mm
Rack dimensions:	500 x 500 mm
Clear entry height:	410 ± 5 mm
Water connection:	G 3/4"
Waste water connection:	ø 50 mm

General data

Weight Standard (net / gross):	83 / 95 kg
Tank capacity:	39 l
Circulating pump:	380 l/min
Noise emission:	<70 dB(A)

Max. theoretical capacity

Racks / h:	60
Plates / h:	960
Glasses / h:	1500

Cycle duration

120 sec. / 60 sec.

Rinse water consumption (under ideal conditions)

2.9 l per rack

Water connection

Flow pressure:	1.0 – 6.0 bar
Flow rate:	at least 8 l/min.
Water inlet temp.:	max. 60° C

Weight pressure point per foot

Max. 40 kg

Extraction

Cubic metres / h:	20
Relative humidity:	100 %
Temperature:	60 °C

Electrical values

Voltage	Fuse protection	Tank heating	Total connected load	Boiler heating	Pumps + Control unit
380 - 415 V / 3N~, 50/60Hz	22 A	4.8 kW	12.84 kW	12.0 kW	0.84 kW