

HOSHIZAKI

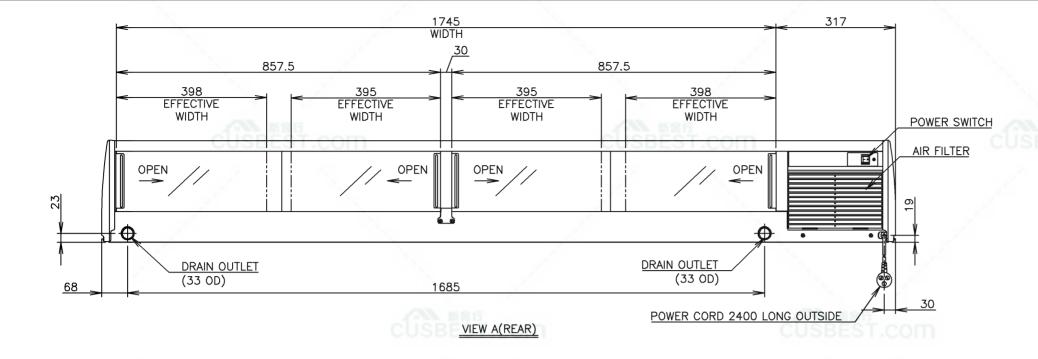

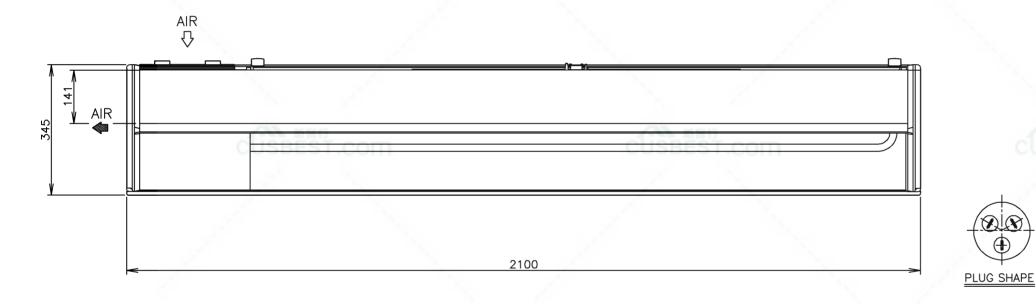


ITEM Hoshizaki Counter Showcase HNC-210BC-L-B MODEL POWER SUPPLY 1 Phase 220V 50Hz Capacity: 0.67kVA (2.8A) Rated: 1.1A Starting: 10A **AMPERAGE** 150W (Power Factor: 55%) ELECTRIC CONSUMPTION HEAT REJECTION 380W Approx. 30min. (Ambient Temp. 30°C, No Load) | Measured 20 mm above the food PULL DOWN TIME (10°C) Approx. 5C (Ambient Temp. 30°, No Load) at the interior bottom center SATURATION TEMPERATURE POWER CORD 2.4m EFFECTIVE CAPACITY 87L 2100mm(W) x 345mm(D) x 270mm(H) OUTSIDE DIMENSIONS INSIDE DIMENSIONS 1745mm(W) x 288mm(D)[Floor] x 157mm(H) Clear Glass, ABS Plastic, PVC Plastic **EXTERIOR INTERIOR** Clear Glass, ABS Plastic, Stainless Steel DOOR Sliding Glass x 4 $[443mm(W) \times 172mm(H)]$ REFRIGERATION SYSTEM Convection Cooling DEFROST SYSTEM N/A COMPRESSOR Hermetic 100W CONDENSER Fin and Tube type, Cooling Fan Motor provided **EVAPORATOR** (Upper) Tube Type, (Lower) Pipe on Sheet Type REFRIGERANT R134a ELECTRICAL CIRCUIT PROTECTION Earth Leakage Circuit Breaker, Earth Wire COMPRESSOR PROTECTION Motor Protector Net: 47kg (Gross: 66kg) WEIGHT Carton (Wooden Pallet) 2180mm(W)×415mm(D)×465mm(H) **PACKAGE** ACCESSORIES Food Mount x 6, Joint x 2, Drain Hose x 1 OPERATING CONDITIONS | Ambient Temperature: 10 - 30°C | Voltage Range: Rated Voltage ±6% *We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the sushi case properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction manual provided.

 Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and
- water connections).

 2. Relative humidity exceeding 60% may result in excessive condensation on the exterior.
- 3. The food temperature is controllable by turning over the food mounts.
- 4. Product Code: S057-C169

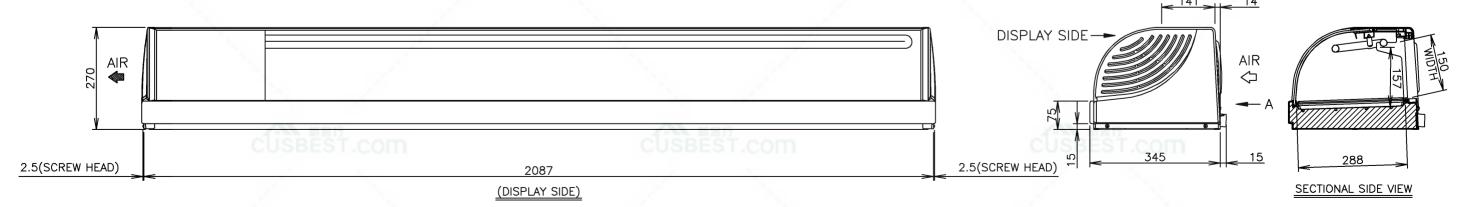

HOSHIZAKI COUNTER SHOWCASE HNC-210BC-L-B